

SGI P.V.C WIRING DUCTS - TYPE-S2


(GST HSN Code: 8538)

S2 WIRING DUCTS: Available in Standard Slots

Size H X W (mm)	Std. Packing (1mtrs / box)	Product Code	Price 1 mtr (in Rupees)	Product Code	Std. Packing (2mtrs / box)	Price 2 mtr (in Rupees)
15 X 15	300	SD-7201	66	SD-7226	150	132
25 X 25	120	SD-7202	103	SD-7227	60	206
30 X 25	100	SD-7203	113	SD-7228	50	226
40 X 30	100	SD-7204	141	SD-7229	50	282
45 X 25	120	SD-7205	136	SD-7230	60	272
45 X 30	100	SD-7206	154	SD-7231	50	308
45 X 45	70	SD-7207	184	SD-7232	35	368
45 X 60	50	SD-7208	218	SD-7233	25	436
60 X 25	90	SD-7209	177	SD-7234	36	354
60 X 45	60	SD-7210	217	SD-7235	25	434
60 X 60	40	SD-7211	253	SD-7236	20	506
75 X 25	70	SD-7212	207	SD-7237	35	414
75 X 45	40	SD-7213	253	SD-7238	20	506
75 X 75	24	SD-7214	381	SD-7239	12	762
80 x 80	24	SD-7215	428	SD-7240	12	856
100x100	18	SD-7216	677	SD-7241	12	1354

Standard Color: Grey | Standard Length: One Metre

For any special Color or Length & Unslotted Ducts 10 % extra will be charged.

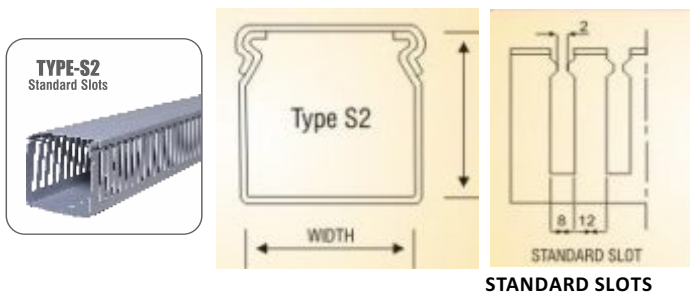


ORDERING INFORMATION FOR ALL TYPES OF WIRING DUCTS

- Standard Length : 1 metre/2 Metre.
- Standard Colour : Grey
- Other Colour & Length are available on request for bulk quantities.
- All Sizes are available in Unslotted (US) Style also.
- All Channels are CE marked.

FEATURES

- Manufactured from specially formulated High Impact Rigid Poly Vinyl Chloride.
- Durable, will not peel, crack or chip. Resists oil & fungus and salt solutions.
- Non-flammable, non-corrosive and rust proof.
- Specially designed side slots prevent popping up of wires while removing cover.
- Slots are elongated at the bottom for smooth and fast installation.

BOTTOM SLOTTING DIMENSIONS



For All Sizes of Type S2 & of width 25,40,45, 60 MM of type S3



For Sizes of width 80,100 MM of type S3

APPLICATIONS

- Provides total electrical insulation.
- Allows good looking and systematic wiring.
- Permits faster fault tracing & rectification.
- Avoids bunching of wires.