

CSR1S-230UYA-SN



SLIM RELY MOD EMR 1CO 230VUC-SN SC CL with snubber protection

- Compact 6.0mm thin design
- Integrated protection circuit.
- Variety of Operating Voltages.
- Available in Screw clamp and spring clamp connection.
- High switching current: up to 6A at 250VAC/30VDC
- Low coil power consumption: 175 mW
- LED Indication on Coil activation.
- Possibility of Jumpering by Push in jumpers.
- Easy legibility top marker
- Choice of pluggable Electromechanical Relays Or Solid State Relays.

TECHNICAL DATA

Bussing Possibility	By Pluggable Jumpers
Supply Voltage Indication	3mm Green LED
Ambient Operating Temperature	-40 to +55 °C
Mounting Possibility	DIN 35/DIN 35-15 Rail
Housing Material	PA 6,6
Housing Colour	Grey
Rated Voltage	230 V
Input Polarity Protection	Bridge Rectifier
Input Signal Protection	RC Protection

RELAY GENERAL SPECIFICATIONS

Relay Type	Electromechanical relay
Relay Make / Manufacturer	Hongfa
Dielectric Strength	1000VAC (Between contacts), 4000 VAC (between coil and contacts)
Insulation Resistance	1000MOhm @ 500VDC
Relay Approvals	UL,CE,VDE

RELAY INPUT / COIL SPECIFICATIONS

Nominal Operating Voltage	230 V
Nominal Input Current	9.25 mA
Maximum Operating Voltage	263 V
Must Operate Voltage	160 V
Must Release Voltage	90 V
Nominal Input Power	2.1 VA

RELAY OUTPUT/CONTACT SPECIFICATIONS

Contact Type	1 CO
Contact Material	AgNi
Contact Resistance	100 m ohms at 1A 6 VDC
Rated Contact Current (Resistive Load)	6 A
Load Voltage Range	400 VAC, 125 VDC at Reduced Load

RELAY OUTPUT/CONTACT SPECIFICATIONS

Maximum Switching Power	1500 VA, 180W
Turn-Off Time	Max 4 ms (no diode, without bounce)
Turn-On Time (0 Cross Turn On)	Max 8 ms (no diode, without bounce)

CONNECTION SPECIFICATIONS

Type of Connection	Screw Connection
Wire Stripping Length	10 mm
Torque	0.4 Nm
Torque	7 lb-in
Min. Wire Size - Stranded(mm2)	0.2 mm ²
Max. Wire Size - Stranded(mm2)	2.5 mm ²
Min. Wire Size - Stranded(AWG)	24 AWG
Max. Wire Size - Stranded(AWG)	12 AWG
Min. Wire Size - Solid	0.2 mm ²
Max. Wire Size - Solid	2.5 mm ²
Min. Wire Size - Solid(AWG)	24 AWG
Max. Wire Size - Solid(AWG)	12 AWG

ORDERING INFORMATION

CAT. NO.	DESCRIPTION	NO. OF CHN.	DIM. DET.	STD. PACK
CSR1S-230UYA-SN	SLIM RELY MOD EMR 1CO 230VUC-SN with snubber protection to protect from short term voltage spikes.	1	6 x 94.5 x 96	10

ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA701-1M	Din 35 Rail unslotted 1 meter	50
	CA701-2M	Din 35 Rail unslotted 2 meter	50
	CA701-2M-S	Din 35 Rail slotted 2 meter	50
	CA701-1M-S	Din 35 Rail slotted 1 meter	50

CSR1S-
230UYA-SN




connectwell
THE RIGHT CONNECTION


ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA701-15-1M	Din 35 Rail 15 deep unslotted 1 meter	50
	CA701-15-1M-S	Din 35 Rail 15 deep slotted 1 meter	50
	CA701-15-2M	Din 35 Rail 15 deep unslotted 2 meter	50
	CA701-15-2M-S	Din 35 Rail 15 deep slotted 2 meter	50
	SCS0.5/3	Electricians Screwdriver for slotted screws	10
	CA509/K6	Blank Marking Tag	100
	JX4/2	Shorting Link for 6 mm wide TB	100
	JX4/3	Shorting Link for 6 mm wide TB	50
	JX4/4	Shorting Link for 6 mm wide TB	50
	JX4/5	Shorting Link for 6 mm wide TB	50
	JX4/8	Shorting Link for 6 mm wide TB	10
	JX4/10	Shorting Link for 6 mm wide TB	10
	JX4/16	Shorting Link for 6 mm wide TB	10
	IMACC/SR1S/60	SLIM RELAY 1CO 60VDC	1

CIRCUIT DIAGRAM

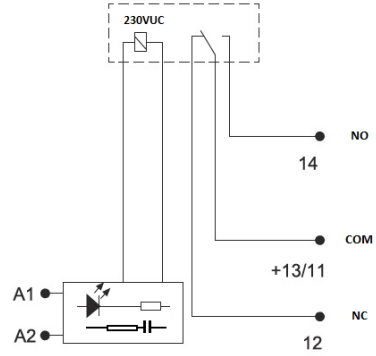

PRODUCT DRAWING

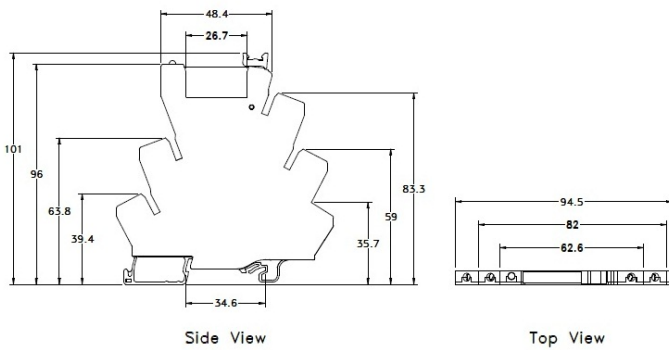

NOTES

Protection Degree:IP20
Pollution Degree:2
Over voltage/Surge voltage category-III
Relay operating time ≤ 8 (msec)
Relay release time ≤ 4 (msec)

Dielectric Strength:
1)Between contacts and coil- 4kV AC (50Hz, 1min)
2)Between contact sets- 2kV AC(50Hz, 1min)
3)Between open contacts-1kV AC(50Hz, 1min)
4)Between Live parts /DIN rail-2kV AC (50Hz, 1min)

Insulation resistance: 1000M ohm@500VDC

Connection wires/ Conductors: 60/75 degC Copper conductor