

# IMRE1SSxx/1 10A



## Relay Module 1CO 110VAC (SPDT)

- Relay Module For Industrial Suitability.
- Switching Current upto 12A at 250VAC
- Easy to replace Pluggable Relays.
- Possibility of Bussing (Jumpering) relays in common negative or common positive configurations.
- LED indication to denote relay actuation.
- Mounting Options available:DIN Rial mounting& Panel mounting

### TECHNICAL DATA

Bussing Possibility	By using spare jumpers.
Relay on Indication	3mm Red LED
Ambient Operating Temperature	-20 to +50 °C
Mounting Possibility	DIN32 / DIN35 / DIN35-15 / PANEL
Housing Material	PVC / V0 Grade
Housing Colour	Green

### RELAY INPUT / COIL SPECIFICATIONS

Nominal Operating Voltage	110 VAC
Maximum Operating Voltage	6.6 V
Must Operate Voltage	86.30 V
Must Release Voltage	17.30 V
Nominal Input Power	0.75 VA
Coil Resistance	8100 Ω

### RELAY OUTPUT/CONTACT SPECIFICATIONS

Contact Type	SPDT - 1CO
Contact Material	AgSno2
Rated Contact Current (Resistive Load)	12 A
Load Voltage Range	440 VAC, 300 VDC

### FUSE HOLDER SPECIFICATIONS

Rated Current	10 A
---------------	------

### CONNECTION SPECIFICATIONS

Type of Connection	Screw Connection
Min. Wire Size	0.5 mm <sup>2</sup>
Max. Wire Size	2.5 mm <sup>2</sup>
Min. Wire Size(AWG)	30 AWG
Max. Wire Size(AWG)	14 AWG
Wire Stripping Length	8.3 mm
Torque	0.5 Nm
Torque	4.5 lb-in

### ORDERING INFORMATION

CAT. NO.	DESCRIPTION	NO. OF CHN.	DIM. DET.	STD. PACK
IMRE1SS1/1 10A	1CO 1CH 110VAC Relay Module With Base (Pluggable Relay) Rail Mount	1	23 X 88 X 74	5
IMRE1SS2/1 10A	1CO 2CH 110VAC Relay Module With Base (Pluggable Relay) Rail Mount	2	45 X 88 X 74	1
IMRE1SS4/1 10A	1CO 4CH 110VAC Relay Module With Base (Pluggable Relay) Rail Mount	4	79 X 88 X 74	1
IMRE1SS8/1 10A	1CO 8CH 110VAC Relay Module With Base (Pluggable Relay) Rail Mount	8	148 X 88 X 74	1
IMRE1SS16/ 110A	1CO 16CH 110VAC Relay Module With Base (Pluggable Relay) Rail Mount	16	289 X 88 X 74	1
IMRE1S1/11 0A	1CO 1CH 110VAC Relay Module With Soldered Relay Raul Mount	1	23 X 88 X 74	5
IMRE1S2/11 0A	1CO 2CH 110VAC Relay Module With Soldered Relay Raul Mount	2	45 X 88 X 74	1
IMRE1S4/11 0A	1CO 4CH 110VAC Relay Module With Soldered Relay Raul Mount	4	79 X 88 X 74	1
IMRE1S8/11 0A	1CO 8CH 110VAC Relay Module With Soldered Relay Raul Mount	8	148 X 88 X 74	1
IMRE1S16/1 10A	1CO 16CH 110VAC Relay Module With Soldered Relay Raul Mount	16	289 X 88 X 74	1

### ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA501-1M	Din 32 Rail unslotted 1 meter	50
	CA501-1M-S	Din 32 Rail slotted 1 meter	50
	CA501-2M	Din 32 Rail unslotted 2 meter	50
	CA501-2M-S	Din 32 Rail slotted 2 meter	50
	CA701-1M	Din 35 Rail unslotted 1 meter	50
	CA701-2M	Din 35 Rail unslotted 2 meter	50
	CA701-2M-S	Din 35 Rail slotted 2 meter	50
	CA701-1M-S	Din 35 Rail slotted 1 meter	50

IMRE1SSxx/1  
10A




**connectwell**  
THE RIGHT CONNECTION

**ACCESSORIES**

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA701-15-1M	Din 35 Rail 15 deep unslotted 1 meter	50
	CA701-15-1M-S	Din 35 Rail 15 deep slotted 1 meter	50
	CA701-15-2M	Din 35 Rail 15 deep unslotted 2 meter	50
	CA701-15-2M-S	Din 35 Rail 15 deep slotted 2 meter	50
	CA509/K2	Marking Tag Blank suitable for CDL4U / CDL4U(I.S) / CTL2.5U / CTL2.5UH / CTL2.5UL / CTL2.5HUL / CTL2.5U(I.S) / CTL2.5U(I.S)D2 / CGMT4 / CSFL4U / CSFL4U(L) / CMT4 / CMB4 / ASF4 / ASF4(L) / CTS2.5()	100
	SCS0.5/3	Electricians Screwdriver for slotted screws	10
	IMACC/1CO/110A	RELAY 1CO 110VAC	10

**CIRCUIT DIAGRAM**

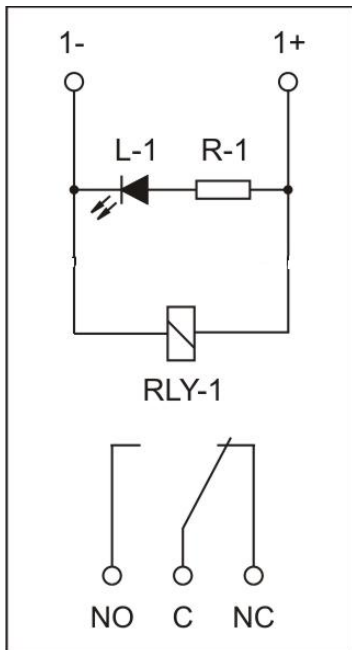

**NOTES**

- \* Module Lengths mentioned are for RAIL Mounting option only. The lengths may vary for PANEL Mounting.
- \*\* PANEL Mounting relay modules are available on request. Please use the suffix -P with the cat. no. for ordering.
- \*\*\*Module with Other Coil Voltage like 6 VDC, 48 VDC, 24 VAC etc. are available on request.
- \*\*\*\*Module with only 1 NO (SPST) contacts are available on request.